


The PowerSeal is a high-performance sealed DC Contactor. It is the ideal choice for hydraulic power packs, gas golf carts, gas mowers, and gas forklifts.

- SPST DC Contactor
- IP66 and IP67 Rated
- Patented Product Design
- Choice of 12V and 24V coil operation

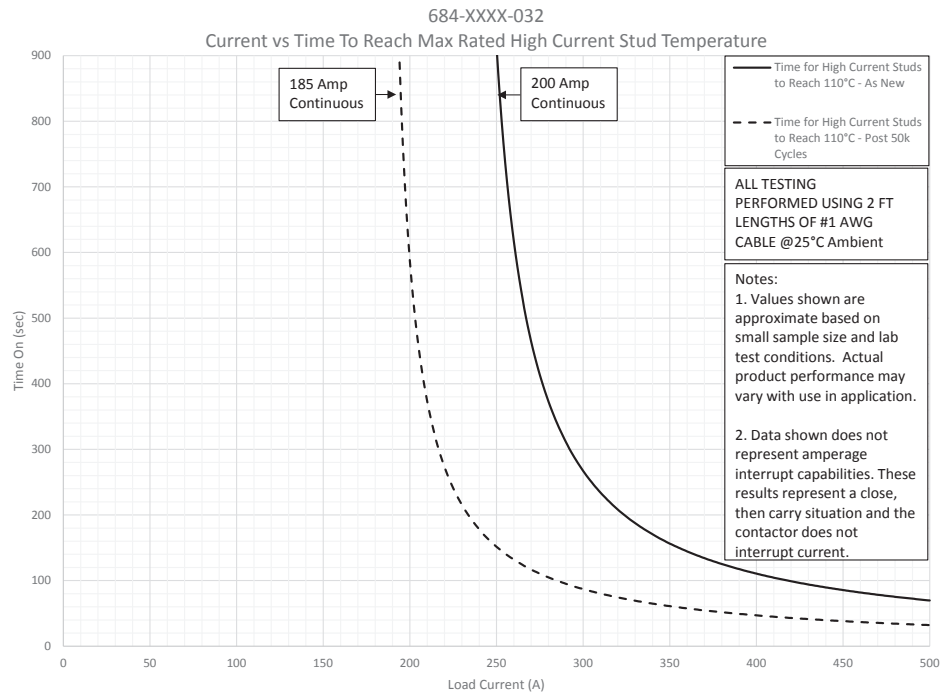

| ELECTRICAL PARAMETERS @ 25°C | | |
|--|---------------------------------------|------------------|
| Model | 684-1221-032-02P | 684-2421-032-02P |
| Coils | 12V | 24V |
| Max Sustained Duty Cycle | 100% | 100% |
| Max On-Time | Continuous | |
| Pull-In Voltage (VDC) | 9 | 18 |
| Hold Voltage (VDC) | 4.5 | 9 |
| Coil Resistance (Ohms) | 13.5 | 48 |
| Contacts | | |
| Inductive Load Carry/ Interrupt (Amps) | 200/300 | 200/300 |
| Peak Inductive In-Rush Capability (Amps) | 1,000 | 1,000 |
| Electrical Cycle Life | 50,000 | 50,000 |
| Contact Material | Copper w/silver alloy contact buttons | |

| MECHANICAL PARAMETERS | |
|-----------------------|---------------|
| Coil Terminals | 10-32 Studs |
| Contact Studs | 5/16-24 Studs |
| Mounting Bracket | Flat Bracket |

| ENVIRONMENTAL | |
|-----------------------------|---------------|
| Operating Temperature Range | -40°C to 65°C |
| Sealing | IP66 and IP67 |

For additional best practices and application details, contact Pollak®.